


## Smart positioning watches

### Operating Instruction



Printed V1.0 (2018) English

## Take good care of children from now on

Please read this quick start user guide carefully before using. The illustration in this quick start user guide is for reference only, please refer to the actual product.

### 1. Preparation before use

- 1 Testing the equipment model if it is correct, and check all the accessories if they are complete.
- 2 Choose the Micro-SIM card which match to the GSM network, you can refer to opinions of the dealer. (Power off before you insert the Micro-SIM card)
- 3 The Micro-SIM card need to be with GPRS function and call screening function.
- 4 Install the APP on the mobile phone, you can ask the seller if don't know how to download it.
- 5 The bar code and QR code is for registration

Content in Box	x1
The watch	x1
USB cable	x1
User manual	x1




Input voltage/electric current: DC=5V-0.35A

## 2. Product function

- location
- Talk
- Alarm clock
- Electronic fence
- SOS for help
- Telephone book
- Remote Power Off

## 3. Watch Introduction

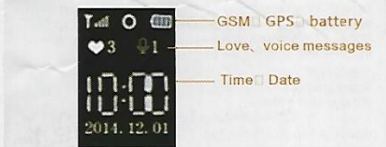

**The button instructions**  
The picture is for reference only, please adjust the watch depends on the real situation.

**Button 1:**  
Touch to make friends;  
Friends recording;  
only for when using the item "Touch to make friends"  
Pressing once this button, it goes to the interface of "Touch to make friends", when two watches make touch together, it can add another as friend. Each watch only can add one friend.

**Button 2:**  
The power button;  
Hang up button;  
send voice message from watch to App;  
Long press for power on; in the main interface, long press for voice recording, release for sending the voice message to the APP; short press for hang up the incoming call.

**Button 3:**  
Phone book;  
Second family number;  
Short press enter the phone book, then short press again to choose phone number, long press for dialing, The phone number in the phone book can

make two-way conversation with the watch . If you have set a second family number on the APP, you can long press to dialing the second family number directly.

- Button 4: SOS button;
  - Answering button;
  - Voice broadcast button;
- If the APP have setting SOS number, long press SOS button for dialing, if get no answer, the watch will call the family number one by one. When you have incoming call, short press to answer the incoming call. when you got voice message, short press for play the voice message

The illustration in this quick start user guide is for reference only  
Please refer to the actual product

## 4. Mobile client operate instructions

4.1 APP register (Note: Please choose the right language and region before register)

Register first before login to your account. The register ID is the ID number which shown on the back cover of the watch, and the ID of the user name is not less than four characters (letters or Numbers) id and user name is the only that can't be repeat, other information can be input casually. And the password can be modified. The registration screen as below:



Pis refer to the real display

### 4.2 Login

#### 4.2.1 APP Functional menu interface

Enter the correct account and password in the APP interface and click login, then you can enter the main interface. As shown in the picture below.



Pis refer to the real display

## 5. Function description


Intercom: watches and app voice dialogue

App sends the voice: after start the recording, App starts recording, then sent it to watch. The longest speech is for 15 seconds. Press the SOS key to play the tape.

Watch recording: Press the power button for 3 seconds to start recording, then sent the tape after loosen the watch, the longest recording is for 15 seconds. The APP will remind you when message was received (The time of receiving voice is related to network status).

Map: check the position of the watch at any time. The interface of map can display the location of the watch and the "location" then the watch will start real time positioning for 3 minutes, upload interval is 10 seconds and restore to the default operating mode after 3 minutes.

Setting: set all the parameters of the watch



Pis refer to the real display

School positioning period: The four period of time only for Monday to Friday, other time don't return to the location information.

Weekend positioning time: the two time only from Saturday and Sunday, setting time watch open and return the GPS position, other time don't return to the location information.

Don't disturb period: all calls will be forbidden during these three period.

SMS alerts Settings: low power, SOS. Two alarm message switch.

Baby contacts: you can set a contact list including 10 phone numbers.

Restore the default work mode: the default work mode: open the 24 hours per day, upload interval of 10 minutes Set SOS number: After connection with your mobile phone, you could choose 3 numbers in your phonebook.

to save as emergency contact persons. In emergency, you can long press the SOS key for 3 seconds to alarm. If the call is answered, it won't dial any more, Or it will keep dialing until the second round finished.

Electronic fence: Fence minimum radius is 200 meters, it will produce the alarm of the fence when a user walk outside of the fence.

Love reward: Select the number of hearts on the app and click the determine key, then the information will be sent to watch. And the screen will show love hearts and number.

Watch alarm: can set 3 alarm clocks, alarm clock can be set according to the kids' requirement.

Looking for watch: You can send this instruction when your watch lost, the watch will ring the bell for a minute, then you can look for your watch, and you can press any key to stop ringing the bell.

## 6. "My" interface:



Pis refer to the real display

"Help" documentation for all functions are made more detailed instructions, customers can take a closer look at.

### 6.1 Watch alarm instructions

Once device receive any alarm, alarm notice will be sent to the client, click to the notice, the client will see the list of alarm details and view them.

### 6.2 Watch working mode functions

Three basic working mode: The normal mode, the power saving mode and real-time positioning mode. The work upload interval of three patterns are different. The working mode is work for "the school localization period" and "weekend orientation session" effectively, it does not positioning outside of the time, the working mode can be set up according to customer needs. Normal mode: upload interval is 600 seconds Power saving mode: upload interval is 3600 seconds Real-time positioning mode: upload interval is 10 seconds

## 7. Device related instructions

### 7.1 SOS emergency alarm

Press the SOS button for 3 seconds, the terminal screen SOS, the terminal will into alarm state, it will dial three SOS number for two rounds. If the call is answered, it won't dial any more. Or it will keep dialing until the second round finished. And at the same time it will send a alarm notification to the APP.

### 7.2 Low power alarm

If the power percentage is less than 20%, it will alarm, and terminal will send a alarm message to the center number. At the same time it will send a alarm notification to the APP.

### 7.3 Talk

Press the power button for 3 seconds to start recording, after releasing the power button to send the tape to the APP. Watch received pronunciation, the screen will have phonetic symbol, short press the SOS button play the tape, after all the voice broadcast marks disappear.

### 7.4 Remote monitoring

Firstly, you need set tutelar number, and send opening voice monitoring instructions to client, then device will dial to the tutelar number, turn to auto answer state. And for one-way conversation, device can't hear voice of the other side

### 7.5 Turn off

Remove SIM card then click turn off button, APK remote control, power off.

### 7.6 The family dialing

There are two family numbers on the device, long press it and dial the number, the family number 1 corresponding SOS number 1r, the family number 2 corresponding SOS number 2.

### 7.7 The phone book

App can be set 10 Numbers, these Numbers can dial telephone to the watch, and realize the two-way conversation.

## 8. Trouble diagnoses

Device can't connect to server at the first time and the backend show off line. Please check below:

- 1) Check if you have put the Micro-SIM card correct, and the screen display is normal, please refer to the picture instruction.
- 2) If your Micro-SIM card is out of service, if you have open the GPRS service.
- 3) Whether GPRS service was canceled
- 4) Check whether the parameters of service is right from the supplier, and then set it right.

## 9. QR code scanning entrance



Android and ios can all scan it, after entering it you could choose android or ios APP ( QQ scan )